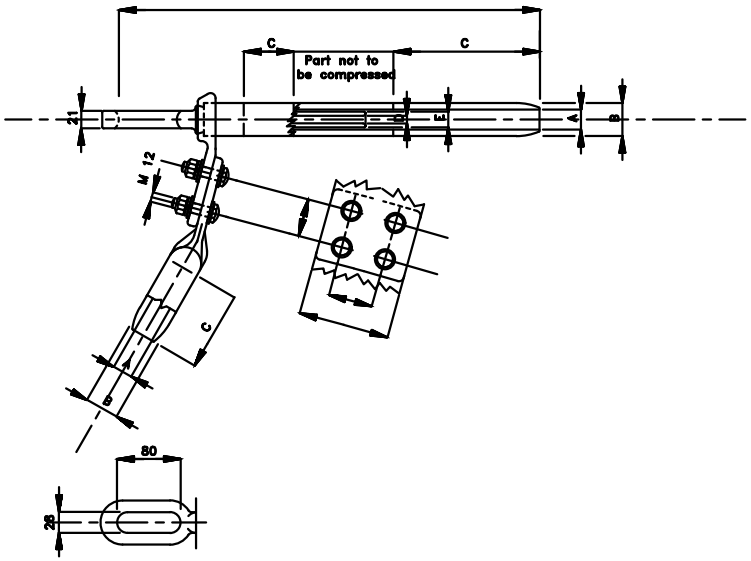



A	B	C	D	E	HEXAGONAL KEY INTERNAL BODY
29	~ 50	PART TO BE COMPRESSED WITH " 44 " HEXAGONAL KEY	7,25	19	16

U. T. S. :_> 100% u.t.s. conductor

Slipping : _> 95% u.t.s. conductor

Not specified tolerances : max ±5%


HEXAGONAL COMPRESSION CLAMP

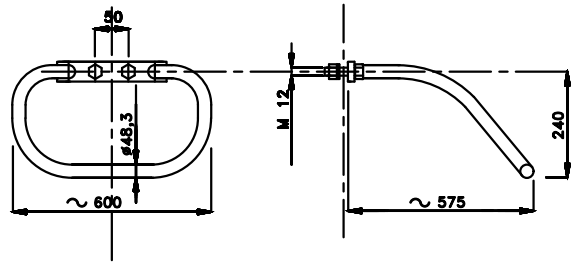

Dimensions are in mm

4	Nut	2	Galv. steel
3	Spring washer	2	Stainless steel
2	Bolt	2	Galv. steel
1	Basket type guard	1	Galv. steel
N°	DENOMINATION	Q.TY	MATERIAL

RACKET TYPE GUARD

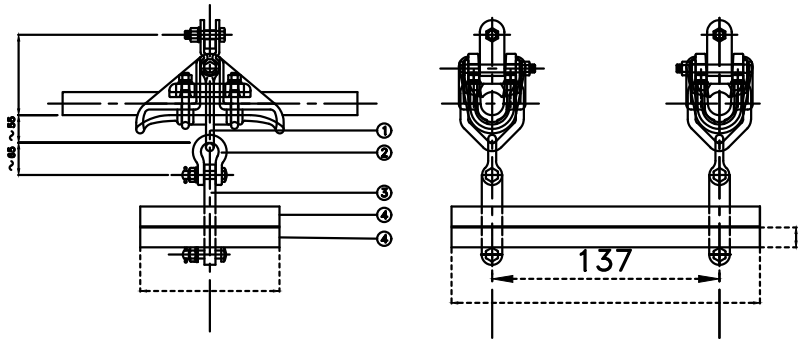

N° of Counterweights: min 1 – max 8. Lenght of supporting rod accordingly

Dimensions are in mm

4	Counterweight	1–8	Galv. Steel	
3	Counterweight supporting rod	2	Galv. Steel	
2	Shackle	2	Galv. Steel	
1	V shackle	2	Galv. Steel	
N°	DENOMINATION	Q.TY	MATERIAL	WEIGHT

COUNTERWEIGHT SET

FOR TENDERING ONLY

DATE	REFERENCE DRAWING	NUMBER

REVISION			
NO	BY	DATE	DESCRIPTION

APPROVED BY
DIRECTOR OF ENGINEERING PLANNING & DESIGN
THIS DRAWING IS THE PROPERTY OF GHANA GRID COMPANY LTD. AND IS NOT TO BE COPIED OR USED WITHOUT ITS WRITTEN PERMISSION

DATE	OCTOBER, 2020
SCALE	NONE
DRAWN BY	
DESIGNED BY	
CHECKED BY	

PROJECT
330kV TRANSMISSION LINE PROJECT

TITLE : MISCELLANEOUS DETAILS FOR TWIN BUNDLE CONDUCTOR "TERN" Ø27.03MM U.T.S. 120kN

Ghana Grid Company Ltd
P.O Box CS 7979, Tema,Ghana
Tel:0303 304818 /0303 310310
Fax :0303 676180 /0303 303327
Email: gridco@gridcogh.com,web:www.gridco.com

GRIDCo
Backbone to Power Delivery

FOR APPROVAL	☐
FOR CONSTRUCTION	☐
FOR INFORMATION	☐

sheet size	Drawing no	sheet /	rev
A3	XXXX	9 / 10	XX