


BILL OF EQUIPMENT				
ITEM	LABEL	DESCRIPTION	UNIT	QUANTITY
1	DTCB	11.5kV DEAD TANK CIRCUIT BREAKER	SET	1
2	DSE	11.5 kV DISCONNECT WITH EARTHING SWITCH	SET	4
3	CSE	CABLE SUPPORT STRUCTURE	SET	4
4	SA	11.5 kV SURGE ARRESTER	No.	12
5	PT	11.5 kV POTENTIAL TRANSFORMER	No.	12
5	BPI	BUS POST INSULATOR	LOT	4
6	PI	11.5 kV POST INSULATORS	LOT	4
7	FE	11.5 kV FUSE	NO.	12
7	DS	11.5 kV DISCONNECT SWITCH	SET	4
8	FEEDER STRUCTURE	FEEDER STRUCTURE	SET	15 LEGGED

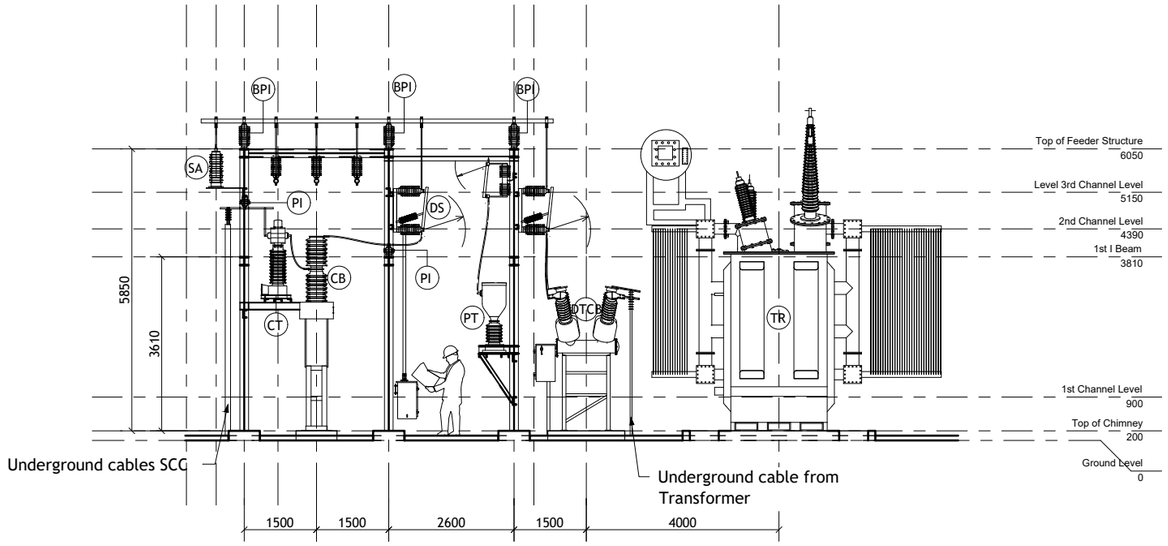

SECTION A - A

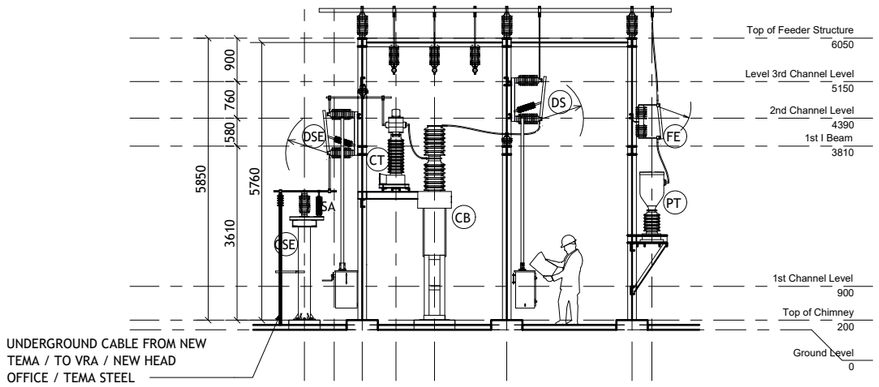

SECTION B - B

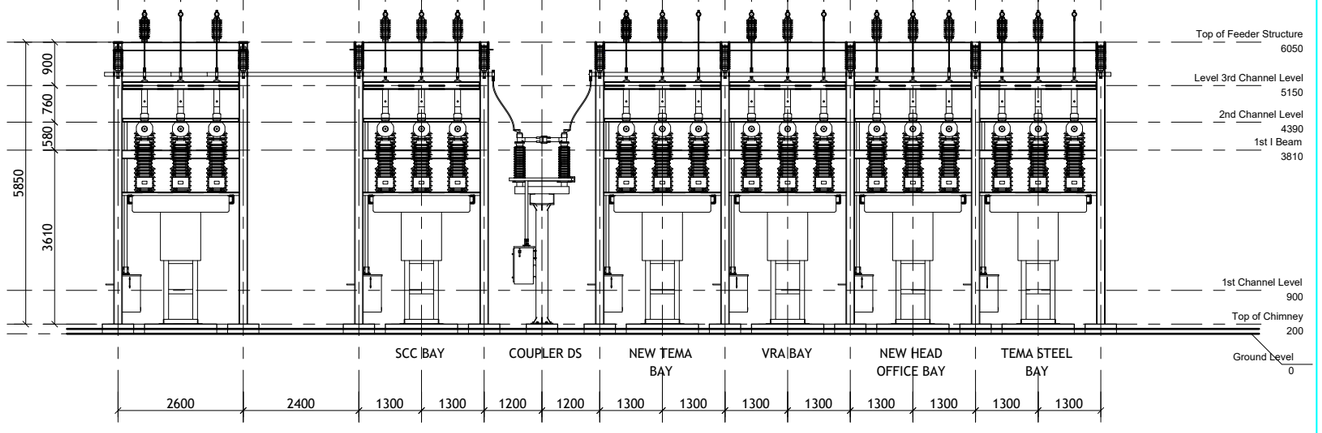

SECTION C - C

REVISION HISTORY			
REV. BY	REV. NO	REV. DATE	DESCRIPTION

APPROVED BY
DIRECTOR OF ENGINEERING PLANNING & DESIGN

THIS DRAWING IS THE PROPERTY OF GHANA GRID COMPANY LTD. AND IS NOT TO BE COPIED OR USED WITHOUT ITS WRITTEN PERMISSION

DATE	APPRIL, 2026
SCALE	1:100
DRAWN BY	ERIC .L LAMPTEY
DESIGNED BY	IDDRISU AKUMBANGE
CHECKED BY	MARTIN AZANE KODJO

PROJECT:
POWER SUPPLY IMPROVEMENT WITHIN TEMA ENCLAVE

TITLE :
ELECTRICAL EQUIPMENT SECTION FEEDER EXPANSION WORKS

Ghana Grid Company Ltd
P.O Box CS 7979, Tema,Ghana
Tel:0303 304818 /0303 310310
Fax :0303 676180 /0303 303327
Email: gridco@gridcogh.com,web:www.gridco.com

FOR APPROVAL	
FOR CONSTRUCTION	
FOR TENDERING ONLY	✓

GRIDCo
Backbone to Power Delivery

sheet size	Drawing no	sheet	Rev
A2		01/01	0